

J165K

DIESEL GENSET

MODEL	J165K
Stand-by Power @ 50Hz	132kW / 165 kVA
Prime Power @ 50Hz	120 kW / 150 kVA

Standard Features

General features :

- Engine (JOHN DEERE , 6068HF120-153)
- Charge alternator 12 V , Governor:Meca
- Alternator (LEROY SOMER , LSA442M95)
- Single bearing alternator IP 23 , insulation class H /H
- Radiator 50°C [122°F] ambient max
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- Microprocessor control panel
- 12 V battery, rack and cable
- Industrial silencer (loose)
- User manual



Generator Ratings

Voltage	HZ	Phase	P.F	Standby Amps	Standby Ratings kW/kVA	Prime Ratings kW/kVA
415/240	50	3	0.8	230	132 / 165	120 / 150
400/230	50	3	0.8	238	132 / 165	120 / 150
380/220	50	3	0.8	251	132 / 165	120 / 150
240/120	50	3	0.8	397	132 / 165	120 / 150
230/115	50	3	0.8	414	132 / 165	120 / 150
220/110	50	3	0.8	433	132 / 165	120 / 150
220/127	50	3	0.8	346	106 / 132	96 / 120
200/115	50	3	0.8	476	132 / 165	120 / 150

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1. A 10% overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

Conditions of sale

- SDMO provides a full line of products with high quality recognized engines and alternators.
- Service and parts are available from SDMO distributors as a single source of responsibility.
- Each and every units is factory tested. All generator sets are also prototype tested.
- Warranty according to our standard conditions. Five years extended also available



ENGINE DATA

Manufacturer / Model	JOHN DEERE 6068HF120-153 , 4-cycle, Turbo , Air/Air DC
Cylinder Arrangement	6 X L
Displacement	6.72L [410.1C.I.]
Bore and Stroke	106mm [4.2in.] X 127mm [5.0in.]
Compression ratio	17 : 1
Rotation speed	1500 Rpm
Piston Speed	6.35m/s [20.8ft./s]
Max. stand by Power at rated RPM	150kW [201BHP]
Frequency regulation, steady state	+/-2. 5%
BMEP	16.3bar [236psi]
Governor : type	Meca

Exhaust System

Exhaust gas flow	385L/s [816cfm]
Exhaust temperature	555°C [1031°F]
Max back pressure	750mm CE [30in. WG]

Fuel System

110% (Stand By power)	36.5L/h [9.6gal/hr]
100% (of the Prime Power)	33.5L/h [8.9gal/hr]
75% (of the Prime Power)	25L/h [6.6gal/hr]
50% (of the Prime Power)	17L/h [4.5gal/hr]
Total fuel flow	108L/h [28.5gal/hr]

Oil System

Total oil capacity w/filters	21.5L [5.7gal]
Oil Pressure low idle	1bar [14.5psi]
Oil Pressure rated RPM	5bar [72.5psi]
Oil consumption 100% load	0.037L/h [0.0gal/hr]
Oil capacity carter	20.6L [5.4gal]

Thermal balance 100% load

Heat rejection to exhaust	99kW [5629Btu/mn]
Radiated heat to ambient	16kW [910Btu/mn]
Heat rejection to coolant	55kW [3127Btu/mn]

Air intake

Max. back pressure	625mm CE [25in. WG]
Engine air flow	170L/s [360cfm]

Coolant System

Radiator & engine capacity	25.8L [6.8gal]
Max water temperature	105°C [221°F]
Outlet water temperature	93°C [199°F]
Fan power	3 kW
Fan air flow	4.44m ³ /s [9409cfm]
Available restriction on air flow	20mm CE [0.8in. WG]
Type of coolant	Gencool
Thermostat	82-94 °C

Emissions

HC	35 mg/Nm ³
CO	150 mg/Nm ³
Nox	2800 mg/Nm ³
PM	80 mg/Nm ³



ALTERNATOR SPECIFICATIONS

GENERAL DATA

- Compliance with NEMA MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards.
- Vacuum-impregnated windings with epoxy varnish.
- IP21 drip proof.

ALTERNATOR DATA

Manufacturer / Type	LERROY SOMER LSA442M95
Number of phase	3
Power factor (Cos Phi)	0.8
Altitude	< 1000 m
Overspeed	2250 rpm
Pole : number	4
Exciter type	Shunt
Insulation : class, temperature rise	H / H
Voltage regulator	R230
Sustained short circuit current	-
Total harmonics (TGH/THC)	< 4%
Wave form : NEMA = TIF – TGH/THC	< 50
Wave form : CEI = FHT – TGH/THC	< 2%
Bearing : number	1
Coupling	Direct
Voltage regulation 0 to 100% load	+/- 1%
Recovery time (20% Volt dip) ms	500 ms
SKVA with 90 % of nominal sustained voltage (at 0.4 PF)	N/A

OTHER ALTERNATOR DATA

Continuous nominal rating @ 40°C	150 kVA
Standby rating @ 27°C	165 kVA
Efficiencies @ 4/4 load	92.1 %
Air flow	0.37m3/s [783.98cfm]
Short circuit ratio;50 (Kcc)	0.42
Direct axis synchro reactance unsaturated (Xd)	317 %
Quadra axis synchro reactance unsaturated (Xq)	190 %
Open circuit time constant;50 (T'do)	2865 ms
Direct axis transient reactance saturated (X'd)	11 %
Short circuit transient time constant (T'd)	100 ms
Direct axis subtransient reactance saturated (X''d)	6.6 %
Subtransient time constant (T''d)	10 ms
Quadra axis subtransient reactance saturated (X''q)	7.8 %
Zero sequence reactance unsaturated (Xo)	0.3 %
Negative sequence reactance saturated (X2)	7.3 %
Armature time constant (Ta)	15 ms
No load excitation current (io)	0.6 A
Full load excitation current (ic)	2 A
Full load excitation voltage (uc)	36 V
Recovery time (Delta U = 20% transitoire)	500 ms
Motor start (Delta = 20% perm. Or 50% trans.)	400 kVA
Transient dip (4/4 charge) – PF : 1.8 AR	14.7 %
No load losses	2.62kW [2.62Kw]
Heat rejection	10.2 kW

Control Panels

NEXYS



Specifications :

- Frequency meter, Ammeter, Voltmeter
- Alarms and faults Oil pressure, water temperature, Overcrank, Overspeed (>60 kVA), Min/max alternator, Low fuel level, Emergency stop
- Engine parameters Hours counter, Engine speed, Battery voltage, Fuel level, Alr preheating

TELYS



Specifications :


- Frequency meter, Ammeter, Voltmeter
- Alarms and faults Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop
- Engine parameters Hours counter, Oil pressure, Water temperature, Engine speed, Battery voltage, Fuel level

Options

Engine and Radiator	Alternator	Control panel
<ul style="list-style-type: none"> Heat shield protection Oil drain extension Heavy duty air filter Lube oil drain pump Radiator core guard Battery charger Block heater 	<ul style="list-style-type: none"> Anti condensation heater Enforced impregnation Oversized alternator 	<ul style="list-style-type: none"> NFPA 110 level 1 Paralleling system Remote annunciator Oil temperature shutdown Key start panel
	Exhaust (Ex II)	Literature
	<ul style="list-style-type: none"> Residential silencer 29dB(A) Critical silencer 40 dB(A) Flexible exhaust conn. 	<ul style="list-style-type: none"> Parts Maintenance
Fuel	Enclosure	
<ul style="list-style-type: none"> Day tank Double wall and great autonomy tank Water separator fuel filter 	<ul style="list-style-type: none"> M226 Silent 68.8 db @ 7m [23 Ft] 	

Weight and Dimensions

Open Model Excluding option




Overall size l x w x h :

2370mm [93in] x 1114mm [44in] x 1480mm [58in]

Weight :

1640kg [3615lbs] Net 1980kg [4364lbs] Brut

With Optional Enclosure

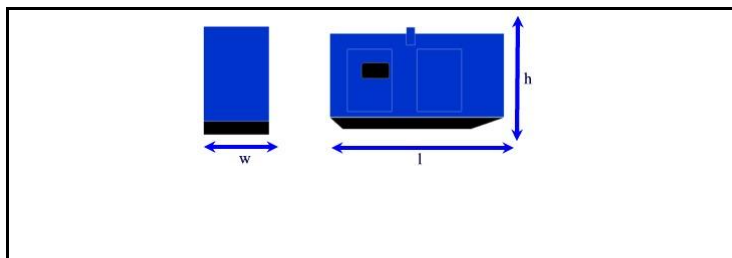

Overall size l x w x h :

3508mm [138in] x 1200mm [47in] x 1830mm [72in]

Weight :

2230kg [4915lbs] Net 2580kg [5686lbs] Brut